

C.I.P.**7,92 x 33 kurz**

TAB.

I



Date

84-06-14

Révision

11-05-25

Pays d'origine: DE

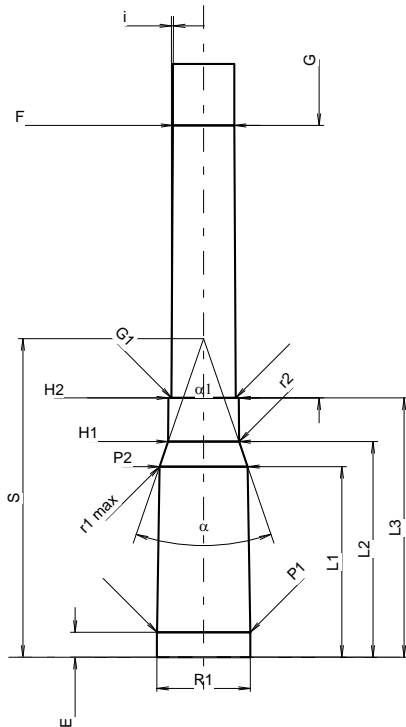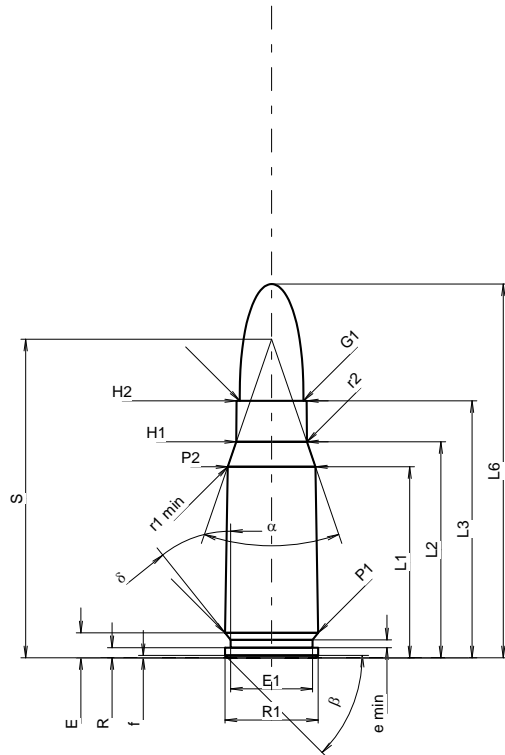

Échelle 1.03:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

L1 ^{1)*}	=	24.53	-0.20
L2 ^{1)*}	=	27.74	-0.20
L3 ¹⁾	=	33.00	
L4	=		
L5	=		
L6	=	48.00	

Culot

R	=	1.30	
R1	=	11.95	
R3	=		
E	=	3.20	
E1	=	10.50	
e min	=	1.00	
delta	=	38°39'36"	
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	11.94	
P2 ^{1)*}	=	11.28	-0.20

Cône de raccordement

alpha	=	37°59'26"	
S	=	40.91	
r1 min	=	0.50	
r2	=	0.50	

Collet

H1 *	=	9.07	
H2 ¹⁾	=	9.00	

Projectile

G1 ¹⁾	=	8.20	
G2	=		
F	=		
L3+G ¹⁾	=	68.00	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3400 bar	
PK	=	3910 bar	
PE	=	4250 bar	
M	=	17.50	
EE	=	1770 Joule	

Autres indications

Fe ¹⁾³⁾	=	0.15	
delta L	=		

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base

CHAMBRE MINI**Longueurs**

L1 *	=	24.49	
L2 *	=	27.70	
L3 ¹⁾	=	33.30	

Cuvette

R	=	1.30	
R1	=	12.00	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.20	
P1 ¹⁾	=	11.97	
P2 *	=	11.31	

Cône de raccordement

alpha ¹⁾	=	37°59'26"	
S	=	40.92	
r1 max	=	0.50	
r2	=	0.50	

Collet

H1 *	=	9.10	
H2 ¹⁾	=	9.03	

Prise de rayures

G1 ^{1)*}	=	8.24	
G ^{1)*}	=	35.00	
alpha1	=	180°	
h *	=		
s	=		
i ¹⁾	=	0°17'11"	
w	=		

Canon

F ^{1)*}	=	7.89	
Z ¹⁾	=	8.20	

Rayures

b	=	4.40	
N	=	4	
u	=	240.00	
Q	=	51.78	mm ²